


Product Description:

Portable and Installed PA loudspeakers used in applications including sound reinforcement and stage monitoring in Houses of Worship, Events, Clubs, Rehearsal Halls, Ballrooms. Σ Series delivers extraordinary performance at unmatched value.

Key Features and Benefits:

- High SPL and sensitivity
- 1 x 6" high power low frequency transducer
- 1 x 1" PEI diaphragm compression driver
- Passive configuration
- 140° x 140° wide angle coverage pattern
- 1 x NL4 connector
- Computer aided design to optimise frequency and phase response
- Multi purpose cabinet design for FOH or monitor use
- Use as a main system with or without sub speaker augmentation.
- Suitable for speech and background music
- Flexible and easy-to-install configurations (wall, ceiling, under balcony)
- U bracket included
- Combine with any ΣB or ΣJ Series high power sub speaker for extended low frequency, high quality music reproduction
- Powder coated grill
- Durable Polyurethane textured base paint
- 1 x NL4 conenctor included in packaging

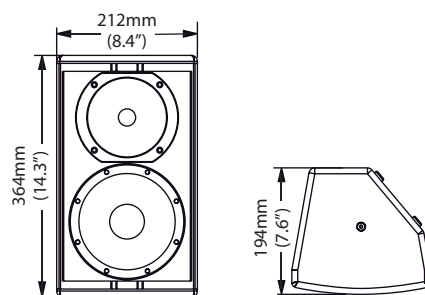

System Specifications:

| | |
|--------------------------------------|---|
| Construction | 15mm Birch Plywood |
| Transducers | 1 x 1" HF Compression Driver + 1 x 6" LF |
| Crossover | 3.2kHz |
| Frequency Response (-3dB) | 50Hz-18kHz |
| Rated Power | 80W (RMS) |
| Sensitivity (1W @ 1m) | 90dB |
| Rated Impedance | 8Ω |
| Dispersion (H x V) | 140° x 140° |
| Connector | 1 x NL4 |
| Dimensions (W x D x H) | 212mm (8.4") x 194mm (7.6") x 364mm (14.3") |
| Packaging Dimensions (2 pieces/pack) | 541mm (21.3") x 293mm (11.5") x 465mm (18.3") |
| Net Weight (2 pieces/pack) | 12kg (26.5lb) |
| Gross Weight (2 pieces/pack) | 15kg (33.1lb) |

